

SPAPPERI



BROCHURE AS06 AT

horticultural product range / transplanting

SPAPPERI

TRANSPLANTING



Spapperi provides a variety of solutions for transplanting of horticultural crops.

We offer a wide range of machinery designed to meet diverse customer needs.

Setups and accessories are available for any requirement.

Custom-designed solutions are also available on request.

Made in Italy - UE



Mechanical transplanting machine with 1 to 6 perforating cups for mulching of seedlings in plastic and polystyrene trays with conical, cube or pyramidal shape root ball, bulbs and seeds. Modular design: from 1 to 6 transplanting elements (more elements on request). Configurable for single or double rows (twin line) transplants, customizable with various accessories

AVANT: Operator seat with integrated support on the frame.

TWINDRIVE: Mechanical transmission with side wheels and hexagonal bar.


TYPE OF TRASPLANT



mulch trasplanting



open-field trasplanting






greenhouse trasplanting




bed trasplanting

TYPE OF PLANTS



	cm	in
A	2 ÷ 6	0.8 ÷ 2.3
B	3 ÷ 7	1.2 ÷ 2.7
C	10 ÷ 20	4 ÷ 7.9
D	13 ÷ 27	5.2 ÷ 10.6

PLANTING LAYOUT

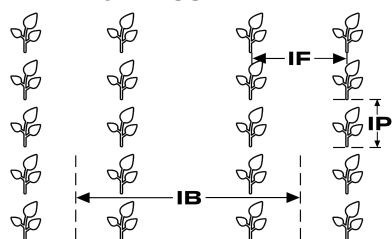

In-plant IP (min-max)

cm	in
18 ÷ 180	7.5 ÷ 70



REGULAR EQUIPMENT

- Frame and number of elements according to the **setup**.
- **Twin Drive mechanical transmission** synchronized between transplanting unit.
- Transplanting element equipped with parallelogram, **cup holder disc (up to 6 housing)**, Ø 280 X 65 mm flex **press wheels**, mulch film **presser sled**, **padded seat with backrest**.
- **Gear kit** for changing inter-plant spacing.
- **Excluding all required specifications and accessories** (perforating cups, trays holder, ecc)

Number of rows

1 - 6

Trasplanting layout

Single rows / Double rows

Quinconce

Yes

Trasmission

Mechanical - Twindrive

Synchronized between transplanting unit

Operator seat

Avant

On the frame with their back to the tractor

In-plant - IP

18 - 180 cm / 7.5 - 70 in

In-row - IF

33 - 195 cm / 13 - 77 in

According frame width

In-double row - IB

130 - 171 cm / 51 - 67 in

According to frame width

Estimated Productivity

2.500 - 3.000 plants/h per row



A **SETUPS (Mandatory):** Select the setup according to the number of rows, the in-row spacing and the frame

B **REQUIRED SPECIFICATIONS (Mandatory):** Select the key configurations to complete the basic functionality.

C **ACCESSORIES:** If needed add any desired accessories.

A AS06 PT SETUPS: CHARACTERISTICS & REQUIREMENTS - (Mandatory choice)

"F2" "R2" FIXED FRAMES FEATURING 2 TUBULARS AND "F3" "R3" FIXED FRAMES FEATURING 3 TUBULARS.

SINGLE ROW		1		2		DRIVE WHEELS
						
Frame width - cm	160	200	200	250		
in	63	78	78	98		
Hook - Cat	1-2	2-3	2-3	2-3		
In-row IF (min-max) - cm	-	-	33-98	33-148		 mod. S
in	-	-	13-39	13-58		
In-row IF (min-max) - cm	-	-	48-70	48-122		 mod. M
in	-	-	19-27	19-48		
Tractor power - Hp	35-45	35-45	45-55	45-55		
Weight (without accessories) - Kg	350	359-467	484-592	495-612		

SINGLE ROW		3 External Trace		3 Internal Trace		DRIVE WHEELS
						
Frame width - cm	250	300	350	400	450	
in	98	118	137	157	177	
Hook - Cat	2-3	2-3	2-3	2-3	2-3	
In-row IF (min-max) - cm	48-75	70-120	70-145	70-170	70-195	 mod. S
in	19-29	27-47	27-57	27-67	27-77	
In-row IF (min-max) - cm	48-62	83-120	83-145	83-170	83-195	 mod. M
in	19-24	33-47	33-57	33-67	33-77	
Tractor power - Hp	55-65	65-75	65-75	65-75	65-75	
Weight (without accessories) - Kg	620-793	632-813	644-905	655-929	667-952	

SINGLE ROW		4		DRIVE WHEELS
				
Frame width - cm	300	350	400	
in	118	137	157	
Hook - Cat	2-3	2-3	2-3	
In-row IF (min-max) - cm	70-80	70-96	70-113	 mod. S
in	27-31	27-37	27-44	
In-row IF (min-max) - cm	-	83-96	83-113	 mod. M
in	-	33-37	33-44	
Tractor power - Hp	75-85	75-85	75-85	
Weight (without accessories) - Kg	757-938	769-1030	780-1054	

Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.

SINGLE ROW

SINGLE ROW		5		6			
							
Frame width - cm	350	400	450	450	WHEELS TRANSMISSION		
in	137	157	177	177			
Hook - Cat	2-3	2-3	2-3	2-3			
In-row IF (min-max) - cm	70-72	70-85	70-97	70-78	 mod. S		
in	27-28	27-33	27-38	27-30			
In-row IF (min-max) - cm	-	83-85	83-97	-	 mod. M		
in	-	33-33	33-38	-			
Tractor power - Hp	85-95	85-95	85-95	95-105			
Weight (without accessories) - Kg	972-1155	982-1179	999-1202	1124-1327			

DOUBLE ROW

		6		
				
Frame width - cm	400	450		
in	157	177		
Hook - Cat	2-3	2-3		
In-row IF (min-max) - cm	33-65	33-75		
in	13-25	13-29		
In-double row IB (min-max) - cm	130-146	130-171		
in	51-57	51-67		
In-row IF (min-max) - cm	33-55	33-65		
in	13-21	13-25		
In-double row IB (min-max) - cm	143-146	143-171		
in	56-57	56-67		
Tractor power - Hp	95-105	95-105		
Weight (without accessories) - Kg	1107-1304	1124-1327		



Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.



REQUIRED SPECIFICATIONS FOR AS06 AT - (Mandatory choice)

B1 Drive wheels



PAIR OF DRIVE WHEELS KIT
MOD. S - DIM. Ø575x145 MM



PAIR OF DRIVE WHEELS KIT
MOD. M - DIM. Ø570x270 MM

B2 Support wheels - (only for frame R2 e R3)




PAIR OF ADJUSTABLE IRON
SUPPORT WHEELS FOR FRAME
DIM. Ø300x150MM




PAIR OF ADJUSTABLE SUPPORT
TYRES FOR FRAME
DIM. Ø400x165MM

B3 Perforating cups



Select the dimension of perforating cup according the A dimension of root ball

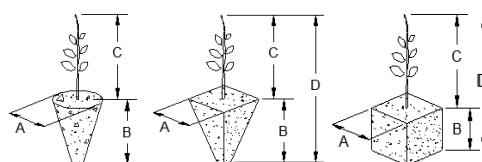

A = 2 ÷ 6 cm

A = 0,8 ÷ 2,3 in

Ø cm (A) 2,0 ÷ 3,0

Ø cm (A) 3,1 ÷ 4,0

Ø cm (A) 4,1 ÷ 5,0

Ø cm (A) 5,1 ÷ 6,0

Ø in (A) 0,8 ÷ 1,1

Ø in (A) 1,2 ÷ 1,5

Ø in (A) 1,6 ÷ 1,9

Ø in (A) 2,0 ÷ 2,3

Mod. S

Mod. M

Mod. L

Mod. XL

For the same in-plant distance, it is recommended to choose the kit with the highest number of cups

IP = **96 ÷ 180** cm IP = **38 ÷ 70** in 1 Cup

IP = **48 ÷ 90** cm IP = **19 ÷ 35** in 2 Cups


IP = **35 ÷ 47** cm IP = **14 ÷ 18** in 3 Cups

IP = **26 ÷ 35** cm IP = **10 ÷ 14** in 4 Cups

IP = **21 ÷ 28** cm IP = **8 ÷ 11** in 5 Cups

IP = **18 ÷ 21** cm IP = **7 ÷ 8** in 6 Cups

PERFORATING CUPS KIT

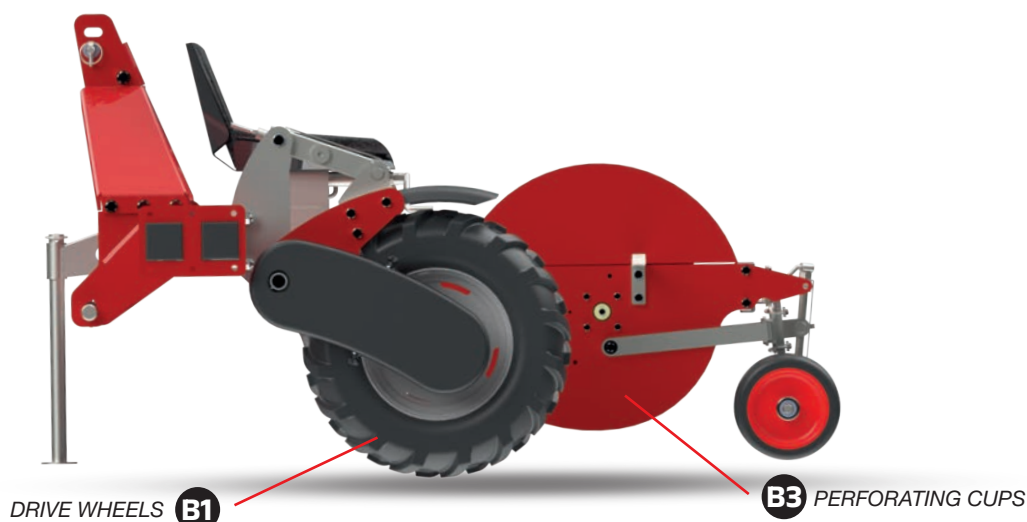



ELEMENT'S ACCESSORIES AVAILABLE FOR AS06 AT

Trays holder - 1 X E



REVOLVING TRAYS HOLDER
4 SLOTS - ELEM. AS06



REVOLVING TRAYS HOLDER
6 SLOTS - ELEM. AS06

Revolving container holders are used for rigid seedling trays, typically made of polystyrene. Spapperi offers two solutions, with 4 and 6 positions, both designed to accommodate all standard tray dimensions.

Cup reducers



CUP REDUCERS KIT FOR
ALL MODEL S / M / L / XL

- Kit
- 1 Cup
- 2 Cups
- 3 Cups
- 4 Cups
- 5 Cups
- 6 Cups

Useful for undergrown or small seedlings
dimension **A < 25 mm**

Bracket for lateral seat



BRACKET KIT FOR LATERAL
POSITIONING OF SEAT - AS06

The side seat bracket kit is necessary
in the case of 2 rows or twin rows
with a less 45 cm in-row space.

Additional seat



DOUBLE SEAT FOR EACH
TRASPLANTING ELEMENT - AS06

To increase transplanting speed,
it is possible to install a double seat
on the element.

Two operators per row allow for an estimated
productivity increase of the machine by 20/30%.

This kit requires a minimum in-row spacing
of 100 cm.

Ausiliary earthing up



PAIR OF EARTHING UP
REAR DISKS - AS06



PAIR OF EARTHING UP REAR DISKS
SPECIFIC FOR POTATOES - AS06





PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH CHAIN TRASMISSION

Spandiconcime



FERTILIZER SPREADER
MECHANICAL TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH MECHANICAL CHAIN TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE WITH TWIN DRIVE / ROLL DRIVE TRASMISSION

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

FERTILIZER SPREADER WITH MECHANICAL CHAIN TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE WITH TWIN DRIVE / ROLL DRIVE TRASMISSION

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
MECHANICAL TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION

Fertilizer spreader



FERTILIZER SPREADER
HYDRAULIC TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
HYDRAULIC TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH ELECTRIC TRASMISSION

Fertilizer spreader




FERTILIZER SPREADER
ELECTRIC TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH ELECTRIC TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

FERTILIZER SPREADER WITH ELECTRIC TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
ELECTRIC TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: CANOPY AND SHELVES TRAYS HOLDER

Shelves trays holder



SHELVES TRAYS HOLDER KIT

SHELVES TRAYS HOLDER
AVAIAABLE FOR ALL MODELS (NO MODELS TU) - REQUIRED R2 OR R3 FRAME

Description

SHELVES TRAYS HOLDER

- Shelves trays holder kit for 200 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 250 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 300 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 350 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 400 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 450 cm width fixed frame - (NO TU)

Canopy



CANOPY KIT

CANOPY
AVAIAABLE FOR ALL MODELS - REQUIRED R2 OR R3 FRAME

Description

CANOPY

- Canopy kit for 200 cm width fixed frame
- Canopy kit for 250 cm width fixed frame
- Canopy kit for 300 cm width fixed frame
- Canopy kit for 350 cm width fixed frame
- Canopy kit for 400 cm width fixed frame
- Canopy kit for 450 cm width fixed frame

Combined -
Canopy & Trays holder



COMBINED KIT
CANOPY & TRAYS HOLDER

CANOPY & SHELVES TRAYS HOLDER
AVAIAABLE FOR ALL MODELS (NOT FOR MODELS TU) - REQUIRED R2 OR R3 FRAME

Descrizione

CANOPY & SHELVES TRAYS HOLDER


- Canopy and shelves trays holder kit for 200 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 250 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 300 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 350 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 400 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 450 cm width fixed frame - (NO TU)



PRIMARY FRAME ACCESSORIES: FOLDING PLATFORMS

AVAILABLE FOR ALL MODELS (TU60-AT AND TU60-AM ESCLUDED) - REQUIRED R2 OR R3 FRAME


Folding Platforms

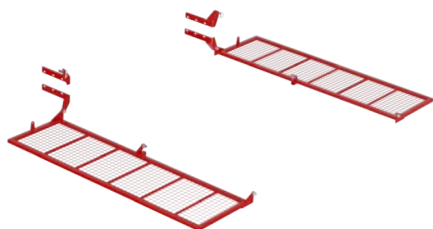

The side platforms are effective for carrying other plant containers, and drip line roll or useful objects during the transplant phase.

Capacity 100 Kg each.

FOLDING PLATFORMS KIT

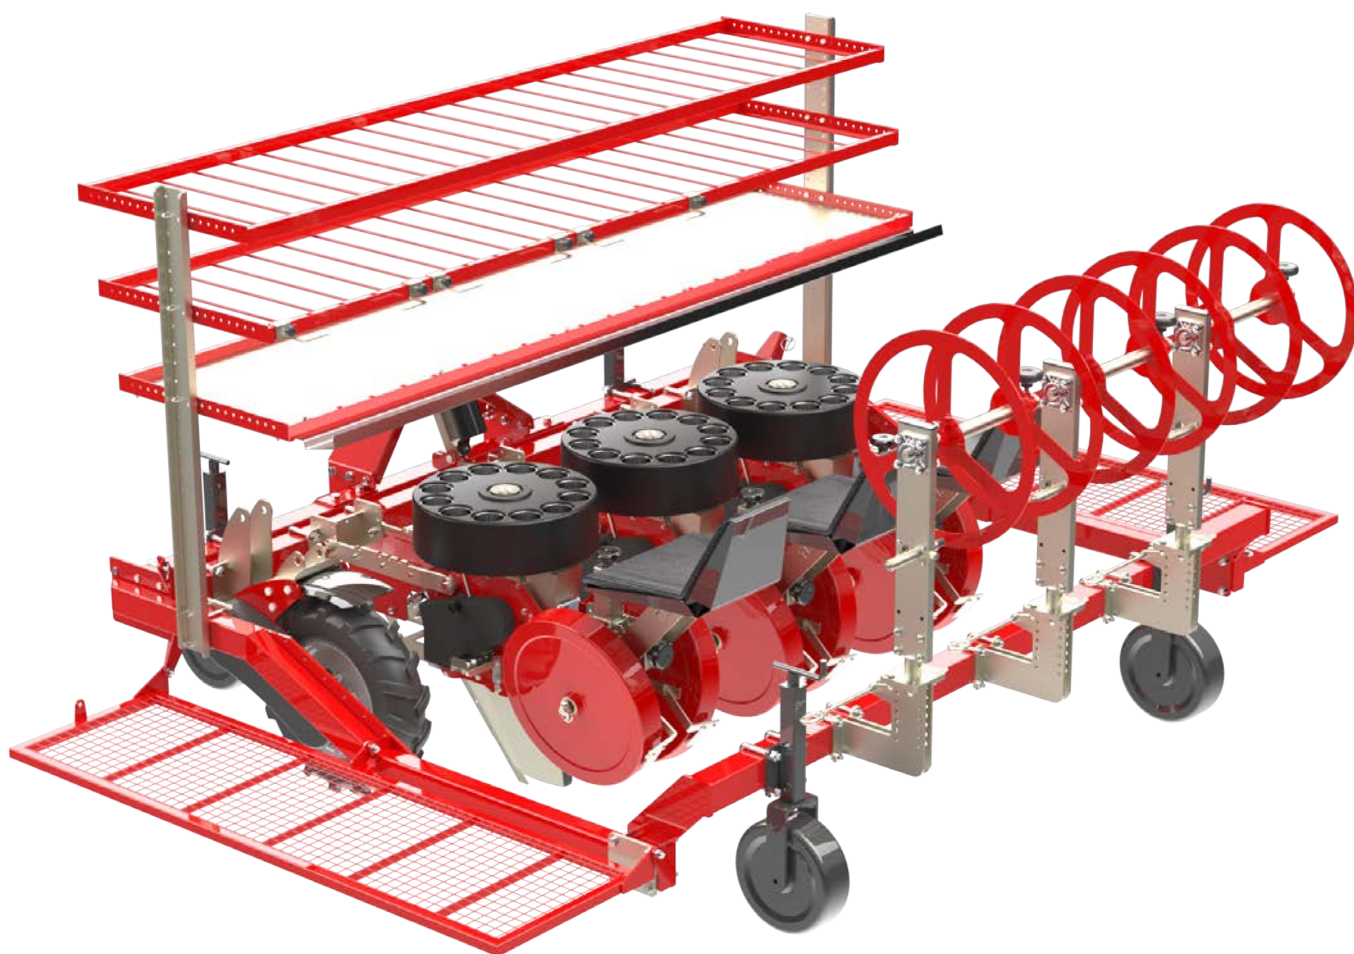



PRIMARY FRAME ACCESSORIES: CONTINUOS WATERING

AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Continuos watering




Description

BRACKET, HOSES AND FITTINGS

- Braket, hoses and fittings kit for 1 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 2 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 3 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 4 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 5 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 6 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 8 row continuos watering, No. 3 1" hoses per row with gate valve
- Braket, hoses and fittings kit for 9 row continuos watering, No. 3 1" hoses per row with gate valve

CONTINUOS WATERING KIT
3 HOSES PER ROW - NOT FOR FOLDABLE FRAME

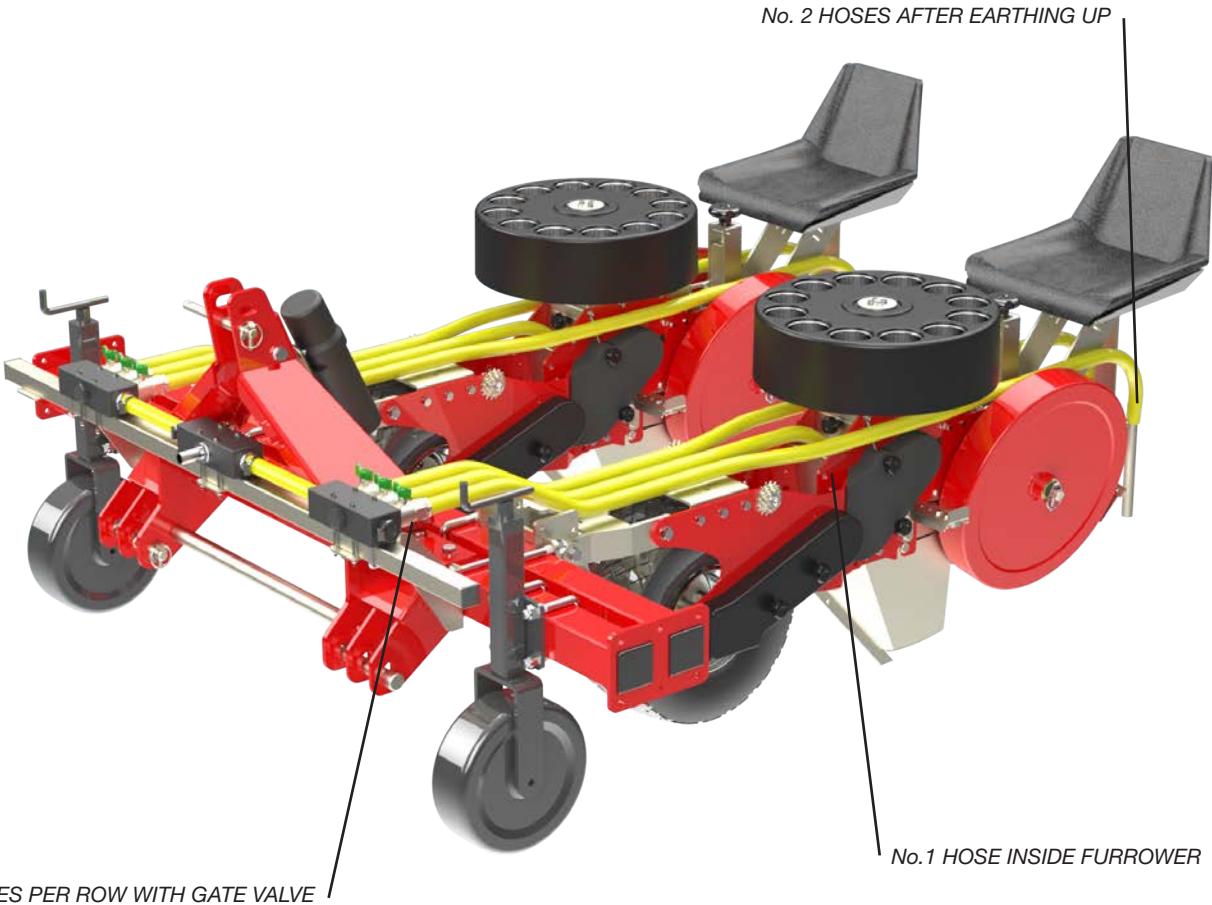

CONFIGURATIONS

Dozing on board the element

Dozing + Bracket hoses and fitting

Dozing + Bracket hoses and fitting + Tanks on board the traslanter

Dozing + Bracket hoses and fitting + Tanks on board the tractor

CONFIGURATIONS LOCALIZED WARTERING SYSTEM

Dozing

1



Bracket hoses and fitting

2



Tanks

3



+

+

+

1

Watering Dosing



WATERING DOZING
MECHANICALLY SINCRONIZED

Descrizione

WATERING DOZING

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TU

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TC

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TB

Localized watering dozing tool, mechanically sincronized, 1" connection - Element AS

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TO

2

Bracket hoses and fitting kit



BRACKET, HOSES AND FITTINGS KIT - NOT FOR FOLDABLE FRAME

Descrizione

BRACKET, HOSES AND FITTINGS

Bracket, hoses and fittings kit for 1 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 2 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 3 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 4 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 5 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 6 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 8 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 9 row localized watering. No 1 1" hoses per row

3

Tanks



PLASTIC TANK CAPACITY 330 L
NOT FOR FOLDABLE FRAME

KIT	No. row	width frame
1 Tank	1 ÷ 3	-
2 Tanks	2 ÷ 6	≥250 cm
3 Tanks	3 ÷ 10	≥350 cm



PLASTIC TANK
CAPACITY 1000 L

For frontal 3 points link
(no street legal)



PRIMARY FRAME ACCESSORIES: IRRIGATION



AVAIABLE FOR ALL MODELS

Irrigation: Dripline roll holder



Description

DRIPLINE ROLL HODER

Single dripline roll holder kit

SINGLE DRIPLINE ROLL HODER

Irrigation: Dripline landing




Description

FIXED DRIPLINE LANDING

Fixed Dripline landing for frame mounting - for frame F2/F3/R2/R3/T2/T3

FIXED - NOT FOR FOLDABLE FRAME



Descrizione

OSCILLATING DRIPLINE LANDING WITH DISK

Oscillating dripline landing with disk - for frame R2/R3

Oscillating dripline landing with disk - for element

OSCILLATING WITH DISK



Description

OSCILLATING DRIPLINE LANDING WITH DISK AND FRONT CUTTING DISK

Oscillating dripline landing with disk and front cutting disk - for frame R2/R3

Oscillating dripline landing with disk and front cutting disk - for element

OSCILLATING WITH DISK AND FRONT CUTTING DISK



Description

OSCILLATING DRIPLINE LANDING WITH HYDRAULIC DISK

Oscillating dripline landing with hydraulic disk - for frame R2/R3


Oscillating dripline landing with hydraulic disk - for element

OSCILLATING WITH HYDRAULIC DISK



PRIMARY FRAME ACCESSORIES: IRRIGATION

AVAILABLE FOR ALL MODELS




Description

OSCILLATING DRIPLINE LANDING WITH WHEEL

Oscillating dripline landing with wheel - for frame R2/R3

Oscillating dripline landing with wheel - for element

OSCILLATING WITH WHEEL



Description

OSCILLATING DRIPLINE LANDING WITH WHEEL AND FRONT CUTTING DISK

Oscillating dripline landing with wheel and front cutting disk - for frame R2/R3

Oscillating dripline landing with wheel and front cutting disk - for element

OSCILLATING WITH WHEEL AND FRONT CUTTING DISK




Description

OSCILLATING DRIPLINE LANDING WITH WHEEL MOUNTING ON PARALLELOGRAM

Oscillating dripline landing with wheel on parallelogram - for frame R2/R3

OSCILLATING WITH WHEEL ON PARALLELOGRAM

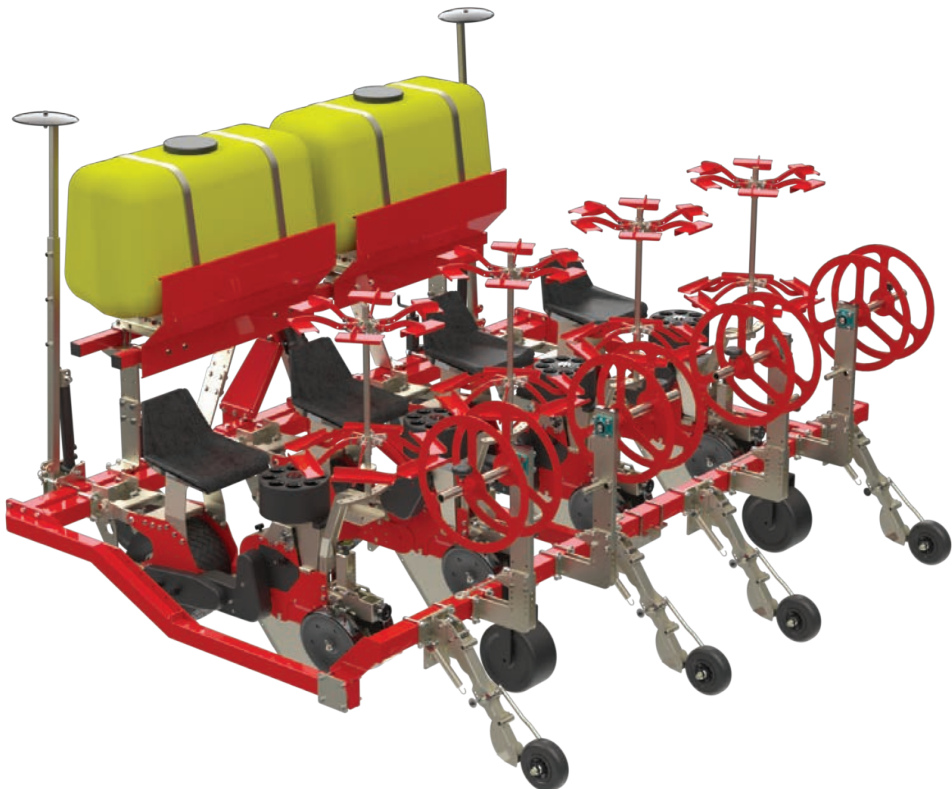



SECONDARY FRAME ACCESSORIES

AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Row traces



Description

MANUAL ROW TRACERS

Pair of manual row tracers - lenght 630 ÷ 930 mm

Pair of manual row tracers - lenght 1580 ÷ 2250 mm

PAIR MANUAL

ROW TRACES - NOT FOR FOLDABLE FRAME



Description

HYDRAULIC ROW TRACERS

Pair of hydraulic row tracers - lenght 630 ÷ 930 mm

Pair of hydraulic row tracers - lenght 1580 ÷ 2250 mm

PAIR HYDRAULIC

ROW TRACES - NOT FOR FOLDABLE FRAME

AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Clod separator



CLOUDS SEPARATOR FOR HEAVY DUTY
AND FRAME MOUNTING

Clod separators facilitate rapid ground leveling by clearing clods and small stones from the soil strip designated for transplanting.

The "heavy-duty series" is distinct from the standard element accessory due to its more robust construction and direct mounting to the main frame.

Beyond the classic option, Spapperi provides a clod separator featuring an integrated single-outlet furrow-opening coulter/knife. As with the element accessory version, this configuration helps reduce wear on the primary furrower and, at the same time, allows for the placement of granular fertilizer within the pre-furrow.



CLOUDS SEPARATOR WITH RIPPER FOR HEAVY DUTY
AND FRAME MOUNTING


Please note: All "heavy-duty series" clod separators are incompatible with the Roll Drive TB12 AR and TB24 AR machine models.

**SECONDARY FRAME ACCESSORIES: ADDITIONAL TRAYS HOLDER****AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME****Additional trays holder**

If the transport of a higher number of seed trays is desired, the additional trays holder is recommended.

The kit has 12 slots, so it allows for the addition of up to 12 seed trays (either polystyrene or plastic).

PAIR OF ADDITIONAL TRAYS HOLDER
+12 SLOTS - EXTERNAL BRACKET

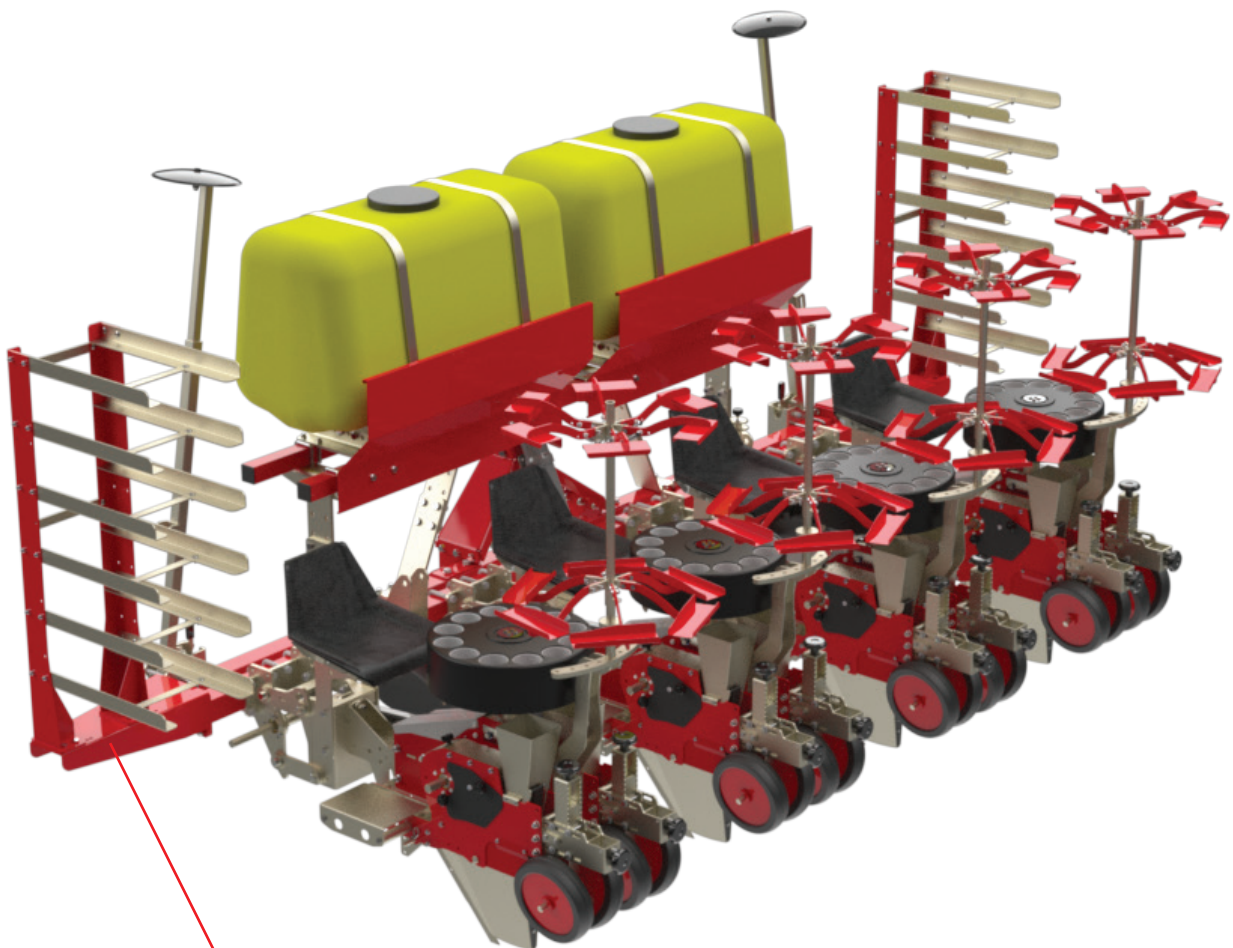

ADDITIONAL TRAYS HOLDER - 6 SLOTS PER SIDE



INFORMATIONS

NOMENCLATURE

REGULAR EQUIPMENT: The basic equipment included with the machine, this does not include required specifications and accessories.

A - SETUP: The basic equipment includes: frame, transplanting units.

B - REQUIRED SPECIFICATIONS: Equipment requested by the customer based on their specific needs, which are mandatory to complete the machine's basic functionality and finalize the order.

C - ACCESSORIES: Optional items requested by the customer according to their needs, which are not mandatory for the basic operation of the machine. These can be selected during the ordering process.

COLOR MACHINE



RED
RAL 3020



LIGHT GREY
RAL 7045



DARK GREY
RAL 7016



BLACK
RAL 9005

CHARACTERISTICS



Fast
tuning



Long
resistance



Good
waterproof



Good thermal
insulation

HS - CODE: TRANSPLANTING MACHINE 84 32 39 90

PRODUCT LINK: spapperi.com/en/products/transplanters/as06-at

INFORMATIONS

Commercial and Technical Brochure - Horticulture Line – Transplanters: The original Italian texts shall prevail over any foreign translation in case of interpretation doubts.

Technical data, measurements, and photos are provided for indicative purposes and are non-binding. Images marked as 'AI generated' are for illustrative/graphic purposes only and do not constitute a warranty or binding specification.

SPAPPERI N.T. s.r.l. reserves the right to make modifications, updates, or discontinue models without notice. Obsolete items will be replaced with products of equivalent performance.

Contents and photos are the exclusive property of SPAPPERI N.T. s.r.l. any reproduction, even partial, is prohibited without prior authorization from Spapperi N.T.

This brochure cancels and replaces all previous versions.

Edition: 01 September 2026

SOCIAL MEDIA HUB



YouTube

SCAN



www.youtube.com/@spapperint

**Subscribe to the channel
and don't miss a new video.**



Instagram

SCAN



www.instagram.com/spapperintsrl

**Follow us now
to stay connected.**



facebook

SCAN



www.facebook.com/spapperintsrl

**Follow our page
and join our community.**



LinkedIn

SCAN



www.linkedin.com/company/spapperi-n-t-s-r-l

**Follow our company page
for industry insights.**



ORIGINAL EQUIPMENT MANUFACTURER

SPAPPERI

SPAPPERI NT S.r.l.

Via P. Ercolani, 5/b - 06012 San Secondo di Città di Castello (PG) Italy
tel. +39 075 8578156 fax +39 075 8575548

www.spapperi.com - info@spapperi.com

