

SPAPPERI



BROCHURE T008 AM

horticultural product range / transplanting

SPAPPERI

TRANSPLANTING



Spapperi provides a variety of solutions for transplanting of horticultural crops.

We offer a wide range of machinery designed to meet diverse customer needs.

Setups and accessories are available for any requirement.

Custom-designed solutions are also available on request.

Made in Italy - UE



Mechanical transplanter machine with 8 cups rotary dispenser for seedlings in plastic and polystyrene trays with conical or pyramidal shape root ball. Modular design: from 1 to 9 transplanting elements (more elements on request).

Configurable for single or double rows (twin line) transplants, customizable with various accessories.


AVANT: Operator seat with integrated support on the frame.

MONODRIVE: Mechanical transmission single-wheel for each element

TYPE OF TRASPLANT



open-field trasplanting




greenhouse trasplanting




bed trasplanting

TYPE OF PLANTS



	cm	in
A	$1.5 \div 6$	$0.6 \div 2.3$
B	$3 \div 7$	$1.2 \div 2.7$
C	$10 \div 20$	$4 \div 7.9$
D	$13 \div 27$	$5.2 \div 10.6$

PLANTING LAYOUT

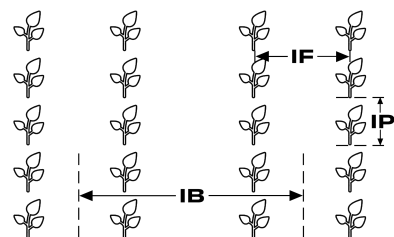

In-plant IP (min-max)	
<i>cm</i>	<i>in</i>
11 ÷ 63	4.5 ÷ 25



REGULAR EQUIPMENT

- Frame and number of elements according to the **setup**.
- **Mono Drive mechanical transmission** integrated into the element.
- Transplanting element equipped with parallelogram, **S-model furrower** for seedlings dim. 2.1 ÷ 3.0 cm (0.8 ÷ 1.1 in), **Ejector** equipped with a self-cleaning movement, transplanting depth adjustment, **padded seat with backrest**.
- **Gear kit** for changing inter-plant spacing.
- **Excluding all required specifications and accessories** (Press wheels, trays holder, ecc)

Number of rows

1 - 9

Trasplanting layout

Single rows / Double rows

Quinconce

NA

Trasmissione

Mechanical Monodrive

Single wheel trasmission for each element

Operator seat

Avant

On the frame with their back to the tractor

In-plant - IP

11 – 63 cm / 4.5 – 25 in

In-row - IF

30 – 204 cm / 12 – 80 in

According to frame width

In-double row - IB

84 – 184 cm / 33 – 72 in

According to frame width

Estimated Productivity

3.000 – 4.500 plants/h per row




A **SETUPS (Mandatory):** Select the setup according to the number of rows, the in-row spacing and the frame

B **REQUIRED SPECIFICATIONS (Mandatory):** Select the key configurations to complete the basic functionality.

C **ACCESSORIES:** If needed add any desired accessories.

A **T008 AM SETUPS: CHARACTERISTICS & REQUIREMENTS - (Mandatory choice)**

"F2" "R2" FIXED FRAMES FEATURING 2 TUBOLARS AND "F3" "R3" FIXED FRAMES FEATURING 3 TUBOLARS.

SINGLE ROW		1		2		3 Traccia esterna	
							
Frame width - cm		160	200	200	200	200	200
	in	78	78	78	78	78	78
Hook - Cat		2-3	2-3	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm		-	-	30-158	37-79	37-79	37-79
	in	-	-	12-64	14-30	14-30	14-30
Tractor power - Hp		25-45	35-45	45-55	55-65	55-65	55-65
Weight (without accessories) - Kg		237	246-354	358-4	470-634	470-634	470-634


SINGLE ROW		3 Traccia interna		400		450	
							
Frame width - cm		250	300	350	400	450	450
	in	98	118	137	157	177	177
Hook - Cat		2-3	2-3	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm		37-104	37-129	37-154	37-179	37-204	37-204
	in	14-41	14-50	14-60	14-70	14-80	14-80
Tractor power - Hp		55-65	65-75	65-75	65-75	65-75	65-75
Weight (without accessories) - Kg		481-654	493-674	505-766	516-790	528-813	528-813

SINGLE ROW		4 Traccia interna		250	
					
Frame width - cm		200	250	250	250
	in	78	98	98	98
Hook - Cat		2-3	2-3	2-3	2-3
In-row IF (min-max) - cm		42-52	42-69	42-69	42-69
	in	17-20	17-27	17-27	17-27
Tractor power - Hp		75-85	75-85	75-85	75-85
Weight (without accessories) - Kg		582-746	593-766	593-766	593-766


Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.

"F2" "R2" FIXED FRAMES FEATURING 2 TUBOLARS AND "F3" "R3" FIXED FRAMES FEATURING 3 TUBOLARS.


SINGLE ROW


	4 Traccia esterna 			
Frame width - cm	300	350	400	450
in	118	137	157	177
Hook - Cat	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm	42-86	42-102	42-119	42-137
in	17-33	17-40	17-46	17-53
Tractor power - Hp	75-85	75-85	75-85	75-85
Weight (without accessories) - Kg	605-786	617-878	628-902	640-925

SINGLE ROW

	5 Traccia interna 		5 Traccia esterna 		
Frame width - cm	250	300	350	400	450
in	98	118	137	157	177
Hook - Cat	2-3	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm	42-52	42-65	42-77	42-90	42-102
in	17-20	17-25	17-30	17-35	20-40
Tractor power - Hp	85-95	85-95	85-95	85-95	85-95
Weight (without accessories) - Kg	705-878	717-898	801-990	817-1014	834-1037

SINGLE ROW


	6 			
Frame width - cm	300	350	400	450
in	118	137	157	177
Hook - Cat	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm	42-51	42-61	42-71	42-81
in	17-20	17-24	17-28	17-31
Tractor power - Hp	95-105	95-105	95-105	95-105
Weight (without accessories) - Kg	829-1010	913-1102	929-1126	946-1149

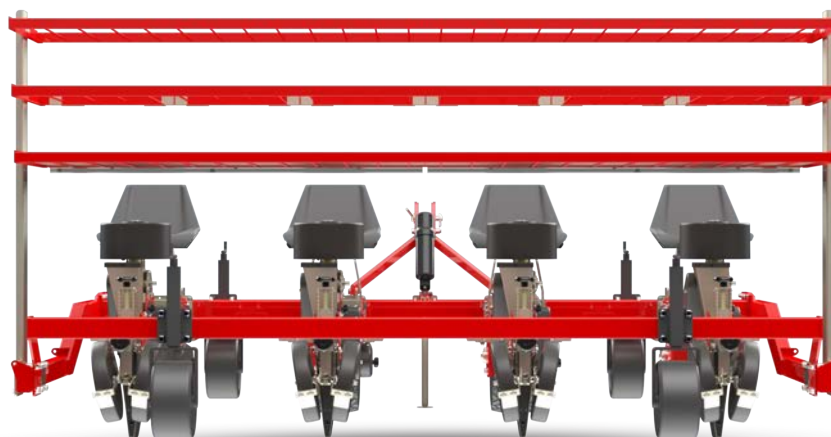


Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.

"F2" "R2" FIXED FRAMES FEATURING 2 TUBOLARS AND "F3" "R3" FIXED FRAMES FEATURING 3 TUBOLARS.

SINGLE ROW


		8			9		
							
Frame width - cm	350	400	450	400	450		
in	137	157	177	157	177		
Hook - Cat	2-3	2-3	2-3	2-3	2-3		
In-row IF (min-max) - cm	42-44	42-51	42-58	42-45	42-51		
in	17-17	17-20	17-22	17-18	17-20		
Tractor power - Hp	105-120	105-120	105-120	105-120	105-120		
Weight (without accessories) - Kg	1137-1326	1153-1350	1170-1373	1265-1462	1282-1485		

DOUBLE ROW

		4			6		
							
Frame width (min-max) - cm	200	250	350	400	450		
in	78	98	137	157	177		
Hook - Cat	2-3	2-3	2-3	2-3	2-3		
In-row IF (min-max) - cm	30-52	30-69	30-61	30-71	30-81		
in	12-20	12-27	12-24	12-27	12-31		
In-double row IB (min-max) - cm	84-118	84-168	84-134	84-159	84-184		
in	33-46	33-66	33-52	33-62	33-72		
Tractor power - Hp	75-85	75-85	95-105	95-105	95-105		
Weight (without accessories) - Kg	582-746	593-766	913-1102	929-1126	946-1149		

DOUBLE ROW

		8	
			
Frame width (min-max) - cm	400	450	
in	157	177	
Hook - Cat	2-3	2-3	
In-row IF (min-max) - cm	30-51	30-58	
in	12-20	12-23	
In-double row IB (min-max) - cm	84-106	84-122	
in	33-41	33-48	
Tractor power - Hp	105-120	105-120	
Weight (without accessories) - Kg	1153-1350	1170-1373	

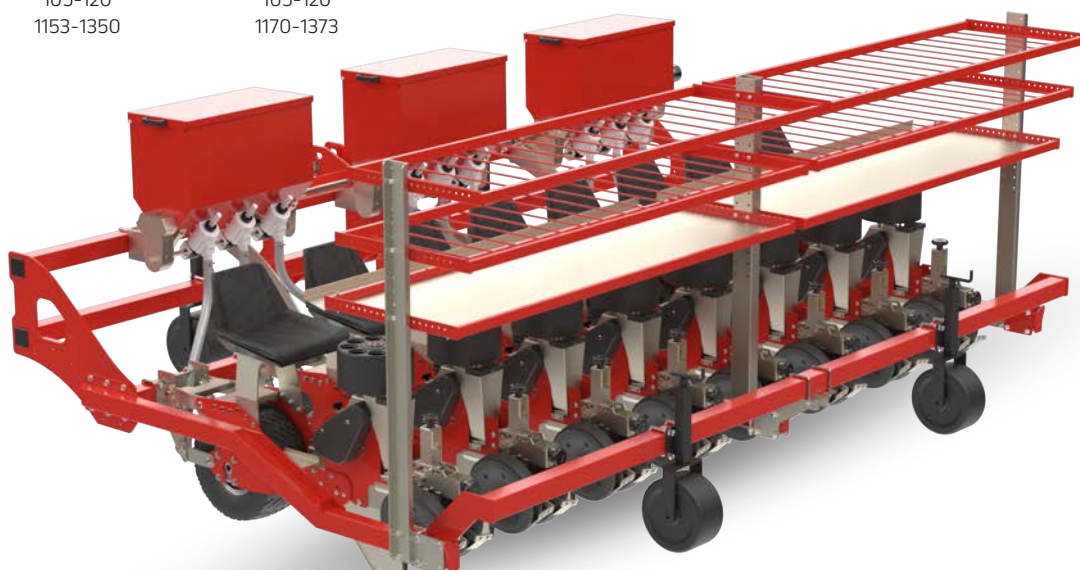


Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.


"T2" TELESCOPIC FRAMES FEATURING 2 TUBOLARS AND "T3" TELESCOPIC FRAMES FEATURING 3 TUBOLARS.

SINGLE ROW

3




4




Frame width - cm	250-350	320-460	250-350	320-460
in	98-137	126-181	98-137	126-181
Hook - Cat	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm	90-140	129-200	67-93	90-135
in	40-55	51-78	27-36	36-47
Tractor power - Hp	75-85	75-85	75-85	75-85
Weight (without accessories) - Kg	638-686	676-726	750-798	788-838

DOUBLE ROW

6





Frame width (min-max) - cm	320-460
in	126-144
Hook - Cat	2-3
In-row IF (min-max) - cm	30-82
in	18-20
In-double row IB (min-max) - cm	108-131
in	43-52
Tractor power - Hp	95-105
Weight (without accessories) - Kg	1012-1062

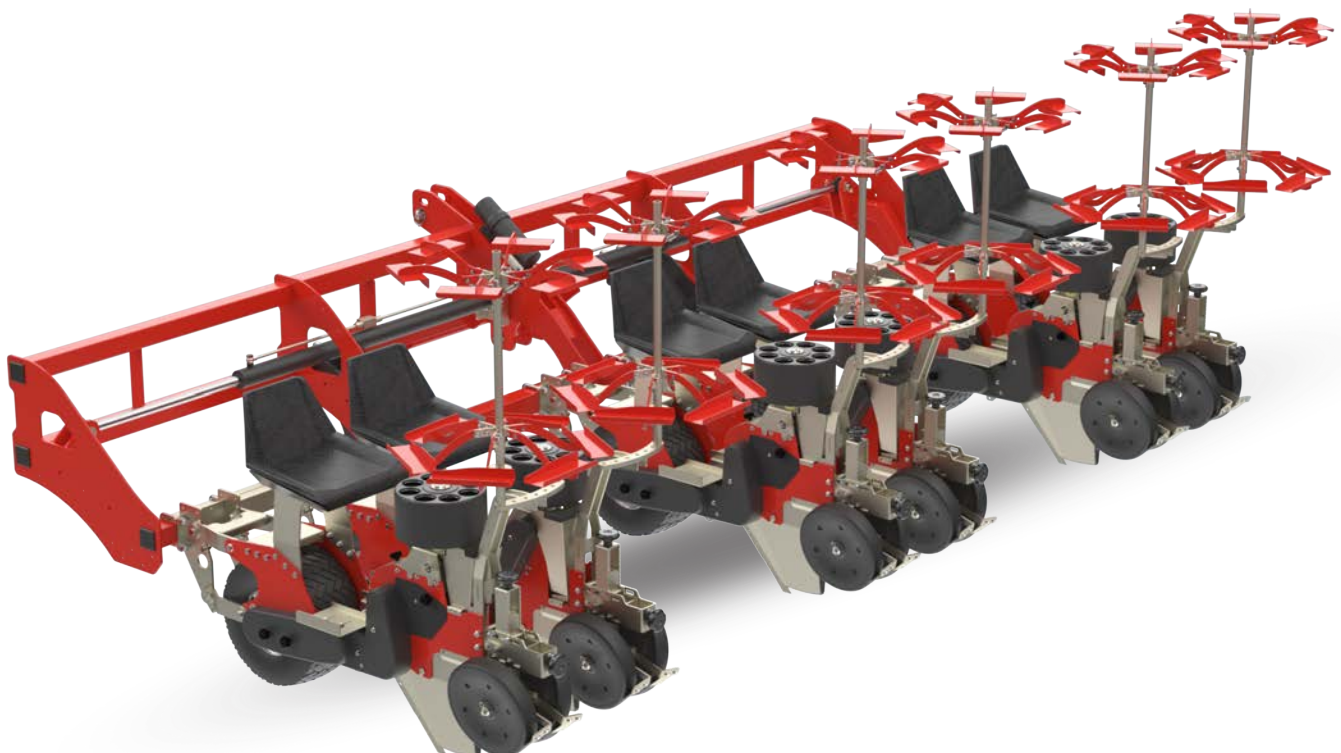


Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.

"P2" FOLDABLE FRAMES FEATURING 2 TUBULARS

SINGLE ROW

	3		4		6	
						
Frame width - cm	320-540	350-640	320-540	350-640	350-640	350-640
in	126-212	138-252	126-212	138-252	138-252	138-252
Hook - Cat	2-3	2-3	2-3	2-3	2-3	2-3
In-row IF (min-max) - cm	140-240	175-290	80-130	115-170	115-118	115-118
in	40-48	69-114	32-51	45-67	45-46	45-46
Tractor power - Hp	75-85	75-85	75-85	85-95	95-105	95-105
Weight (without accessories) - Kg	863	873	975	985	1209	1209

DOUBLE ROW

	6	
		
Frame width (min-max) - cm	320-540	350-640
in	126-212	138-252
Hook - Cat	2-3	2-3
In-row IF (min-max) - cm	30-98	30-118
in	12-38	12-46
In-double row IB (min-max) - cm	115-215	197-265
in	45-84	77-104
Tractor power - Hp	95-105	95-105
Weight (without accessories) - Kg	1199	1209



Custom setups upon request for a higher number of rows and for maximum distances (in-row/in-double row) exceeding standard values.



REQUIRED SPECIFICATIONS FOR T008 AM - (Mandatory choice)

B1 Revolving distributor



8 CUPS REVOLVING DISTRIBUTOR
WITH FIXED PLATE - TO



8 CUPS REVOLVING DISTRIBUTOR
WITH OPENING HATCH - TO

The rotating distributor's opening door design protects the roots by preventing it from dragging and potentially getting damaged on the underlying plate

B2 Press wheels



FLEX PRESS WHEELS KIT
DIM. Ø 330 X 80 MM



FLEX PRESS WHEELS KIT
FLEX DIM. Ø 450 X 80 MM



IRON PRESS WHEELS
DIM. Ø 500 X 80 MM

The rubber outer layer of the flex press wheels minimizes soil sticking


B3 Support wheels



PAIR OF ADJUSTABLE IRON
SUPPORT WHEELS FOR FRAME
DIM. Ø300x150MM



PAIR OF ADJUSTABLE SUPPORT
TYRES FOR FRAME
DIM. Ø400x165MM

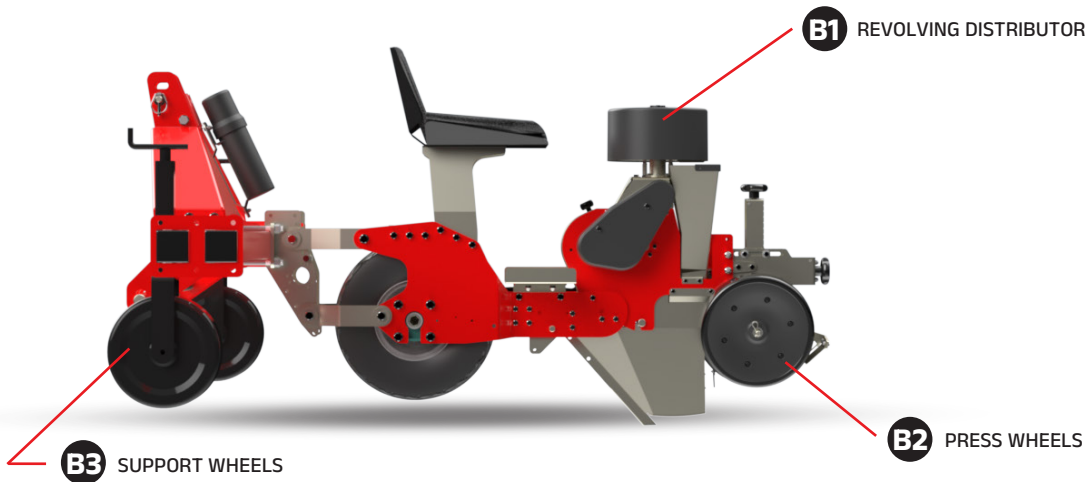



ELEMENT'S ACCESSORIES AVAILABLE FOR T008 AM

Trays holder




REVOLVING TRAYS HOLDER KIT
4 SLOTS - T008 AM



REVOLVING TRAYS HOLDER KIT
6 SLOTS - T008 AM

Revolving container holders are used for rigid seedling trays, typically made of polystyrene. Spapperi offers two solutions, with 4 and 6 positions, both designed to accommodate all standard tray dimensions.



Furrower



FURROWER KIT

Ø cm (A)	Ø in (A)	Mod
1.5 ÷ 2.0	0,6 ÷ 0,7	XS
2.1 ÷ 3.0	0,8 ÷ 1,1	S
3.1 ÷ 4.0	1.2 ÷ 1.5	M
4.1 ÷ 5.0	1,6 ÷ 1.9	L
5.1 ÷ 6.0	2,0 ÷ 2,3	XL

Select the furrower according A dimation of root ball



A = 1.5 ÷ 4 cm

A = 0.6 ÷ 1,5 in

Microgranulator



MICROGRANULATOR KIT
T008 AM

Mechanically driven microgranulator featuring a 10-liter plastic hopper, equipped with a dosing device and delivery tubes.

Mounted directly on the transplanting element, this microgranulator enables the continuous application of granular insecticides onto the soil in close proximity to the plants.

Compression spring



COMPRESSION SPRING KIT
T008

For Avant elements with frame-mounted operator seats, Spapperi recommends a compression spring to improve transplanting depth stability, especially in tough soil conditions.

Lids cup



LIDS CUP KIT - 8 PCS

By using plugs/lids in the cups of the rotating distributor, you can quickly change the in-plantdistance. This offers alternative spacing solutions without needing to replace the transmission gears.

Cup extensions



CUP EXTENSIONS KIT - 8 PCS

Cup extensions placed on the revolving distributor are used for highly developed seedlings.



ELEMENT'S ACCESSORIES AVAIBLE FOR T008 AM

Furrow openersFURROW OPENER KIT
MOUNTING ON FURROWERFURROW OPENER KIT
MOUNTING ON ELEMENT

The furrow openers helps by creating a preliminary furrow (pre-furrower). This reduces the cutting force required by the main furrower and minimizing its wear.

Particularly the furrow openers mounting on element, provides enhanced transplanting depth stability, especially when working in heavy or tough soils. Additionally, this tool is also effective for placing granular fertilizer directly into the pre-furrow during operation.

Clods Separators

SEPARATOR CLODS KIT

SEPARATOR CLODS AND
FURROW OPENER KIT

Clod separators are useful for quick leveling by moving clods or small rocks away from the transplanting area.

In addition to the classic solution, Spapperi provides a clod separator combined with a single-outlet furrow-opening knife, useful for reducing wear on the furrower and simultaneously burying granular fertilizer in the pre-furrow.

Cutting coulter

CUTTING COULTER KIT

DOUBLE CUTTING
COULTER KIT

The residue-cutting coulter is a free-wheeling disc enabling operation in medium-light to heavy/tough soil conditions. Its rotating action can effectively cut through weeds.





PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH WHEEL TRASMISSION

Fertilizer spreader



FERTILIZER SPREADER
MECHANICAL TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH MECHANICAL WHEEL TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE MONODRIVE TRASMISSION

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
MECHANICAL TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH MECHANICAL WHEEL TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE WITH MONODRIVE TRASMISSION

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION

Fertilizer spreader



FERTILIZER SPREADER
HYDRAULIC TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
HYDRAULIC TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH HYDRAULIC TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: FERTILIZER SPREADER WITH ELECTRIC TRASMISSION

Fertilizer spreader



FERTILIZER SPREADER
ELECTRIC TRASMISSION
IRON STEEL BOX 105L
DOSING EXCLUDED

FERTILIZER SPREADER WITH ELECTRIC TRASMISSION AND IRON STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3

FERTILIZER SPREADER WITH ELECTRIC TRASMISSION AND STAINLESS STEEL BOX AVAILABLE FOR ALL MACHINE

No. of row	In-row IF	Frame width	Nr. of box
1	-	-	1
2	≤ 140 cm / 32 in	-	1
2	tutte le interfile	≥ 200 cm / 78 in	2
3	≤ 70 cm / 32 in	-	1
3	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
3	tutte le interfile	≥ 300 cm /137 in	3
4	≤ 140 cm / 32 in	≥ 200 cm / 78 in	2
4	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
5	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
5	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
6	≤ 70 cm / 32 in	≥ 200 cm / 78 in	2
6	≤ 140 cm / 32 in	≥ 300 cm /137 in	3
7	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
8	≤ 80 cm / 32 in	≥ 300 cm /137 in	3
9	≤ 70 cm / 32 in	≥ 300 cm /137 in	3



FERTILIZER SPREADER
ELECTRIC TRASMISSION
STAINLESS STEEL BOX 105L
DOSING EXCLUDED

Fertilizer dosing - Each



SINGLE PIPE GRANULATOR
FERTILAZER DOSING KIT



DOUBLE PIPE GRANULATOR
FERTILAZER DOSING KIT



PRIMARY FRAME ACCESSORIES: CANOPY AND SHELVES TRAYS HOLDER

Shelves trays holder



SHELVES TRAYS HOLDER KIT

SHELVES TRAYS HOLDER
AVAIAABLE FOR ALL MODELS (NO MODELS TU) - REQUIRED R2 OR R3 FRAME

Description

SHELVES TRAYS HOLDER

- Shelves trays holder kit for 200 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 250 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 300 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 350 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 400 cm width fixed frame - (NO TU)
- Shelves trays holder kit for 450 cm width fixed frame - (NO TU)

Canopy



CANOPY KIT

CANOPY
AVAIAABLE FOR ALL MODELS - REQUIRED R2 OR R3 FRAME

Description

CANOPY

- Canopy kit for 200 cm width fixed frame
- Canopy kit for 250 cm width fixed frame
- Canopy kit for 300 cm width fixed frame
- Canopy kit for 350 cm width fixed frame
- Canopy kit for 400 cm width fixed frame
- Canopy kit for 450 cm width fixed frame

Combined -
Canopy & Trays holder



COMBINED KIT
CANOPY & TRAYS HOLDER

CANOPY & SHELVES TRAYS HOLDER
AVAIAABLE FOR ALL MODELS (NOT FOR MODELS TU) - REQUIRED R2 OR R3 FRAME

Descrizione

CANOPY & SHELVES TRAYS HOLDER


- Canopy and shelves trays holder kit for 200 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 250 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 300 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 350 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 400 cm width fixed frame - (NO TU)
- Canopy and shelves trays holder kit for 450 cm width fixed frame - (NO TU)



PRIMARY FRAME ACCESSORIES: FOLDING PLATFORMS

AVAILABLE FOR ALL MODELS (TU60-AT AND TU60-AM ESCLUDED) - REQUIRED R2 OR R3 FRAME


Folding Platforms

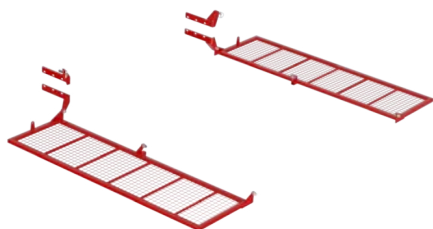

The side platforms are effective for carrying other plant containers, and drip line roll or useful objects during the transplant phase.

Capacity 100 Kg each.

FOLDING PLATFORMS KIT

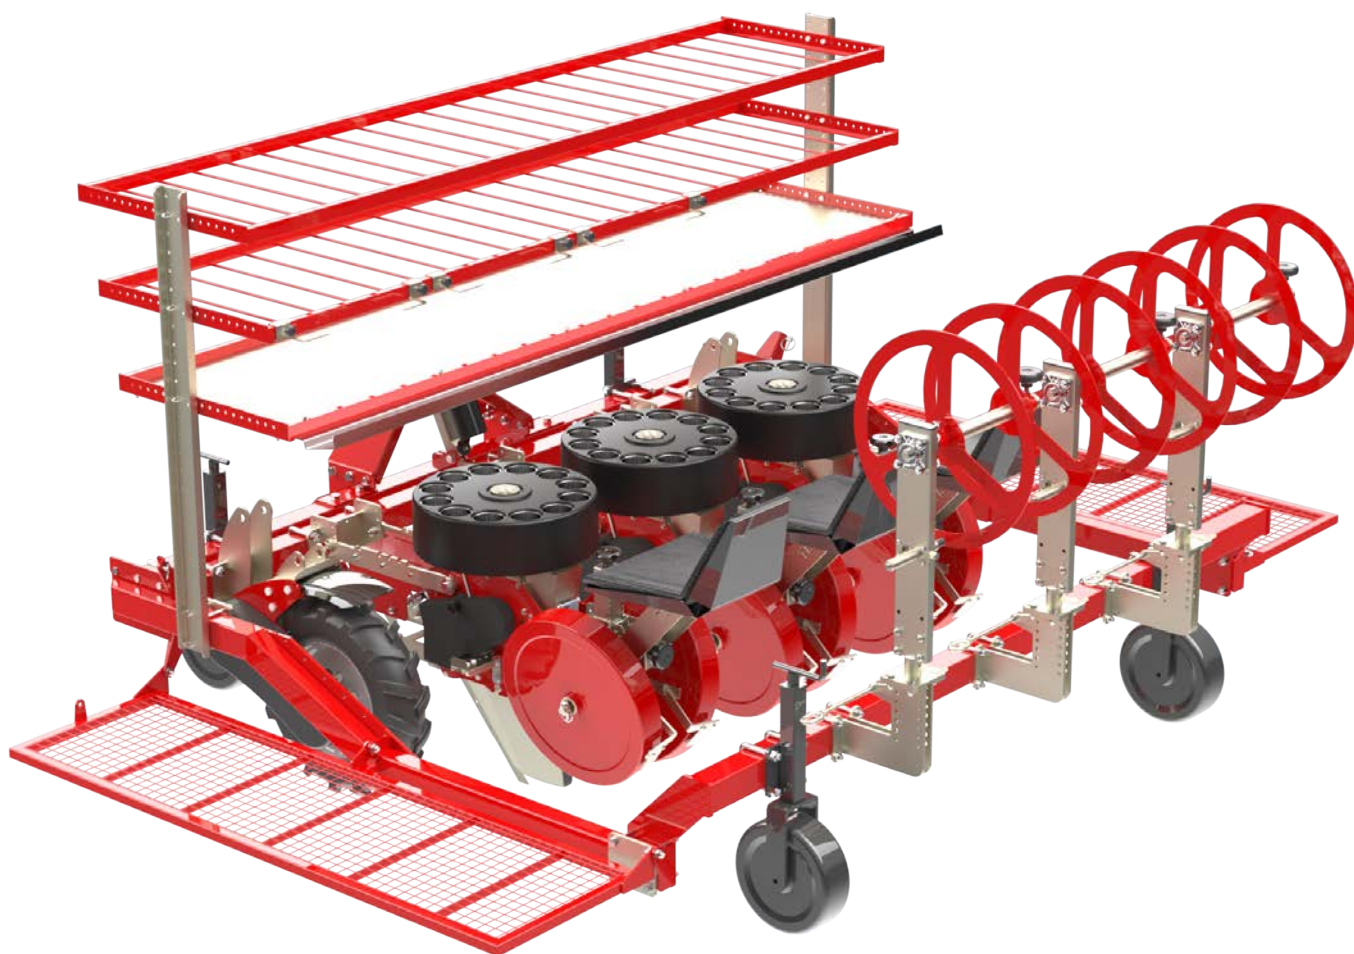



PRIMARY FRAME ACCESSORIES: CONTINUOS WATERING



AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Continuos watering



Description

BRACKET, HOSES AND FITTINGS

Braket, hoses and fittings kit for 1 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 2 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 3 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 4 row continuos watering, No. 3 1" hoses per row with gate valve


Braket, hoses and fittings kit for 5 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 6 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 8 row continuos watering, No. 3 1" hoses per row with gate valve

Braket, hoses and fittings kit for 9 row continuos watering, No. 3 1" hoses per row with gate valve

CONTINUOS WATERING KIT
3 HOSES PER ROW - NOT FOR FOLDABLE FRAME

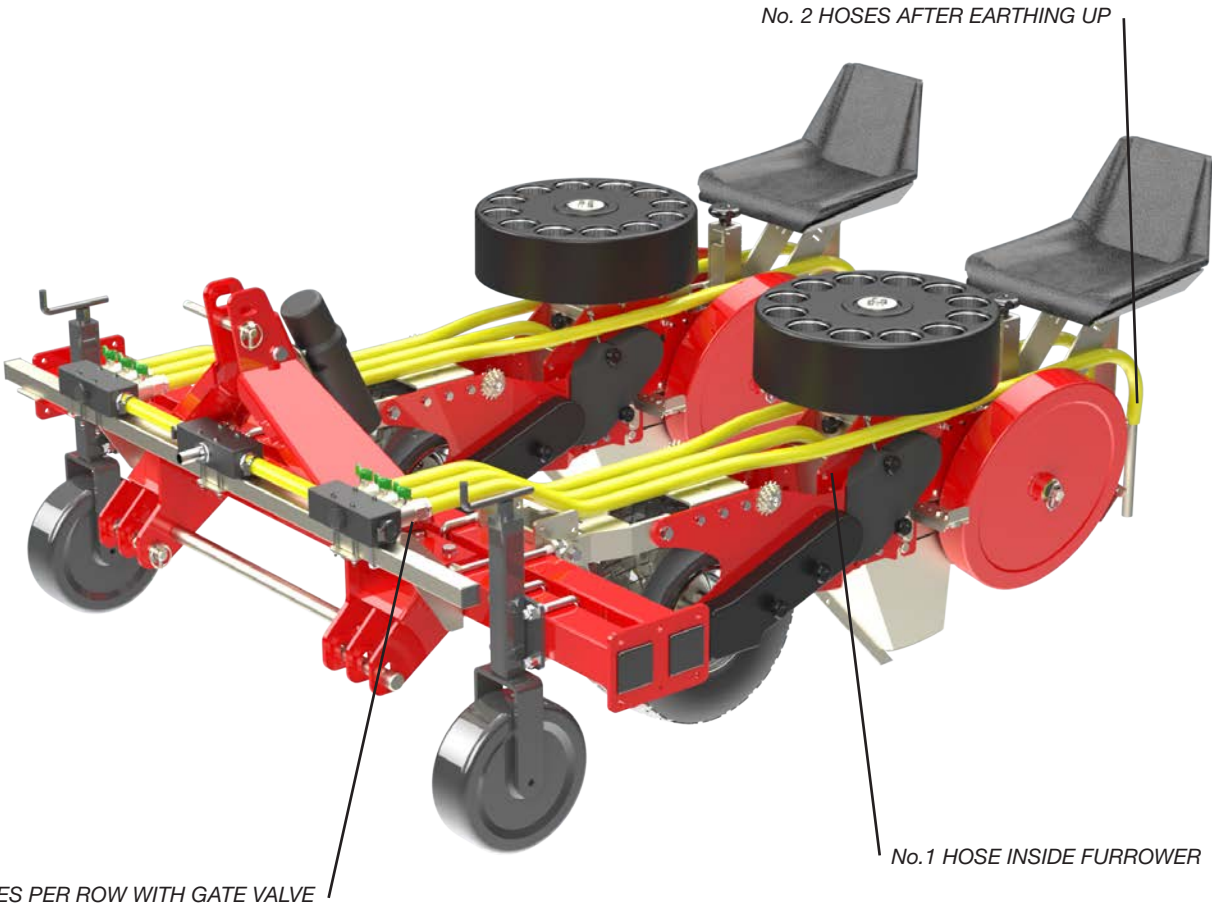

No.3 1" HOSES PER ROW WITH GATE VALVE

No.1 HOSE INSIDE FURROWER

No. 2 HOSES AFTER EARTHING UP

AVAILABLE FOR ALL MODELS

CONFIGURATIONS

Dozing on board the element

Dozing + Bracket hoses and fitting

Dozing + Bracket hoses and fitting + Tanks on board the traslanter

Dozing + Bracket hoses and fitting + Tanks on board the tractor

CONFIGURATIONS LOCALIZED WARTERING SYSTEM

Dozing

Bracket hoses and fitting

Tanks

1

2

3









+

+

+

+







+

+

+



1 Watering Dozing



WATERING DOZING

MECHANICALLY SINCRONIZED

Descrizione

WATERING DOZING

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TU

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TC

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TB

Localized watering dozing tool, mechanically sincronized, 1" connection - Element AS

Localized watering dozing tool, mechanically sincronized, 1" connection - Element TO

2 Bracket hoses and fitting kit



BRACKET, HOSES AND FITTINGS KIT - NOT FOR FOLDABLE FRAME

Descrizione

BRACKET, HOSES AND FITTINGS

Bracket, hoses and fittings kit for 1 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 2 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 3 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 4 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 5 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 6 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 8 row localized watering. No 1 1" hoses per row

Bracket, hoses and fittings kit for 9 row localized watering. No 1 1" hoses per row

3 Tanks



PLASTIC TANK CAPACITY 330 L

NOT FOR FOLDABLE FRAME

KIT	No. row	width frame
1 Tank	1 ÷ 3	-
2 Tanks	2 ÷ 6	≥250 cm
3 Tanks	3 ÷ 10	≥350 cm

PLASTIC TANK

CAPACITY 1000 L

For frontal 3 points link

(no street legal)



PRIMARY FRAME ACCESSORIES: IRRIGATION



AVAIABLE FOR ALL MODELS

Irrigation: Dripline roll holder



Description

DRIPLINE ROLL HODER

Single dripline roll holder kit

SINGLE DRIPLINE ROLL HODER

Irrigation: Dripline landing




Description

FIXED DRIPLINE LANDING

Fixed Dripline landing for frame mounting - for frame F2/F3/R2/R3/T2/T3

FIXED - NOT FOR FOLDABLE FRAME



Descrizione

OSCILLATING DRIPLINE LANDING WITH DISK

Oscillating dripline landing with disk - for frame R2/R3

Oscillating dripline landing with disk - for element

OSCILLATING WITH DISK



Description

OSCILLATING DRIPLINE LANDING WITH DISK AND FRONT CUTTING DISK

Oscillating dripline landing with disk and front cutting disk - for frame R2/R3

Oscillating dripline landing with disk and front cutting disk - for element

OSCILLATING WITH DISK AND FRONT CUTTING DISK



Description

OSCILLATING DRIPLINE LANDING WITH HYDRAULIC DISK

Oscillating dripline landing with hydraulic disk - for frame R2/R3


Oscillating dripline landing with hydraulic disk - for element

OSCILLATING WITH HYDRAULIC DISK



PRIMARY FRAME ACCESSORIES: IRRIGATION

AVAILABLE FOR ALL MODELS




Description

OSCILLATING DRIPLINE LANDING WITH WHEEL

Oscillating dripline landing with wheel - for frame R2/R3

Oscillating dripline landing with wheel - for element

OSCILLATING WITH WHEEL



Description

OSCILLATING DRIPLINE LANDING WITH WHEEL AND FRONT CUTTING DISK

Oscillating dripline landing with wheel and front cutting disk - for frame R2/R3

Oscillating dripline landing with wheel and front cutting disk - for element

OSCILLATING WITH WHEEL AND FRONT CUTTING DISK




Description

OSCILLATING DRIPLINE LANDING WITH WHEEL MOUNTING ON PARALLELOGRAM

Oscillating dripline landing with wheel on parallelogram - for frame R2/R3

OSCILLATING WITH WHEEL ON PARALLELOGRAM

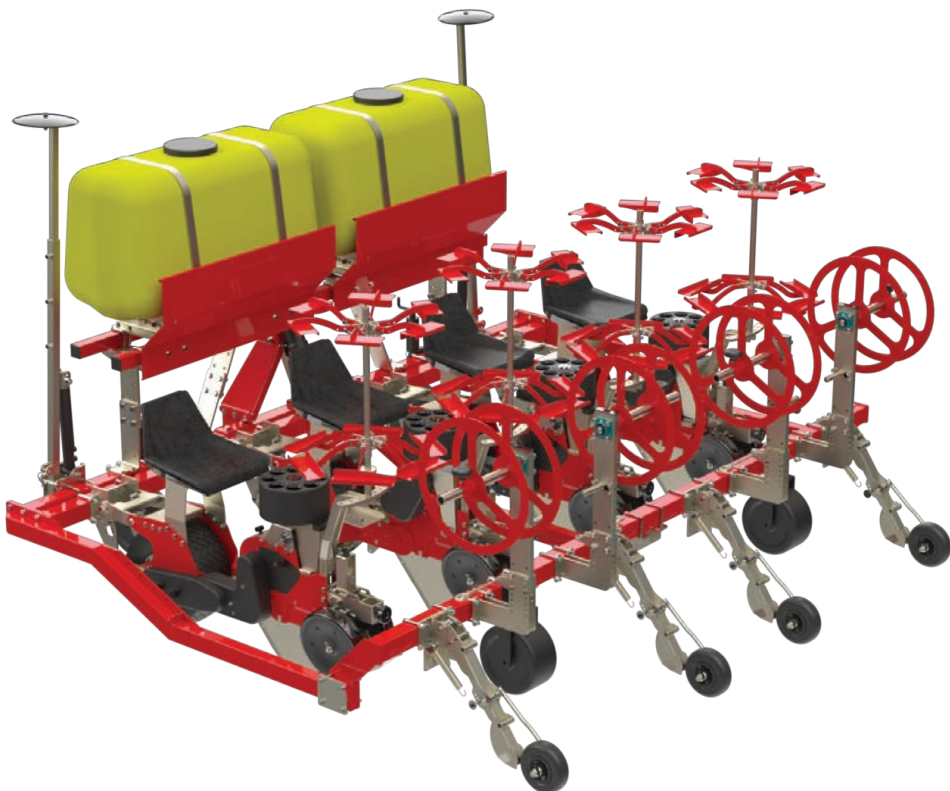



SECONDARY FRAME ACCESSORIES

AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Row traces



Description

MANUAL ROW TRACERS

Pair of manual row tracers - lenght 630 ÷ 930 mm

Pair of manual row tracers - lenght 1580 ÷ 2250 mm

PAIR MANUAL

ROW TRACES - NOT FOR FOLDABLE FRAME



Description

HYDRAULIC ROW TRACERS

Pair of hydraulic row tracers - lenght 630 ÷ 930 mm

Pair of hydraulic row tracers - lenght 1580 ÷ 2250 mm

PAIR HYDRAULIC

ROW TRACES - NOT FOR FOLDABLE FRAME

AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME

Clod separator



CLOUDS SEPARATOR FOR HEAVY DUTY
AND FRAME MOUNTING

Clod separators facilitate rapid ground leveling by clearing clods and small stones from the soil strip designated for transplanting.

The "heavy-duty series" is distinct from the standard element accessory due to its more robust construction and direct mounting to the main frame.

Beyond the classic option, Spapperi provides a clod separator featuring an integrated single-outlet furrow-opening coulter/knife. As with the element accessory version, this configuration helps reduce wear on the primary furrower and, at the same time, allows for the placement of granular fertilizer within the pre-furrow.

Please note: All "heavy-duty series" clod separators are incompatible with the Roll Drive TB12 AR and TB24 AR machine models.




CLOUDS SEPARATOR WITH RIPPER FOR HEAVY DUTY
AND FRAME MOUNTING

**SECONDARY FRAME ACCESSORIES: ADDITIONAL TRAYS HOLDER****AVAILABLE FOR ALL MODELS - NOT FOR FOLDABLE FRAME****Additional trays holder**

If the transport of a higher number of seed trays is desired, the additional trays holder is recommended.

The kit has 12 slots, so it allows for the addition of up to 12 seed trays (either polystyrene or plastic).

PAIR OF ADDITIONAL TRAYS HOLDER
+12 SLOTS - EXTERNAL BRACKET

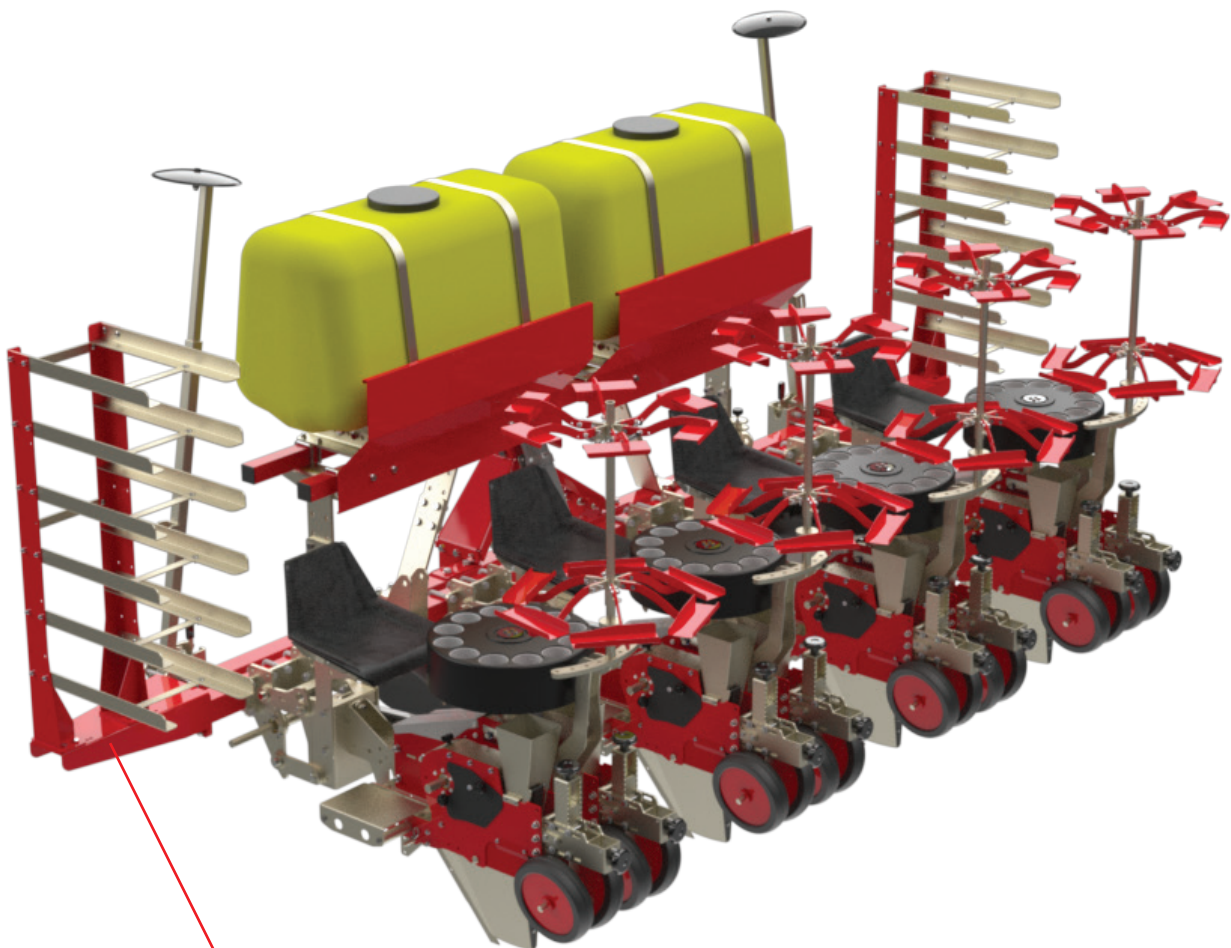

ADDITIONAL TRAYS HOLDER - 6 SLOTS PER SIDE



INFORMATIONS

NOMENCLATURE

REGULAR EQUIPMENT: The basic equipment included with the machine, this does not include required specifications and accessories.

A - SETUP: The basic equipment includes: frame, transplanting units.

B - REQUIRED SPECIFICATIONS: Equipment requested by the customer based on their specific needs, which are mandatory to complete the machine's basic functionality and finalize the order.

C - ACCESSORIES: Optional items requested by the customer according to their needs, which are not mandatory for the basic operation of the machine. These can be selected during the ordering process.

COLOR MACHINE



RED
RAL 3020



LIGHT GREY
RAL 7045



DARK GREY
RAL 7016



BLACK
RAL 9005

CHARACTERISTICS



**Fast
tuning**



**Long
resistance**



**Good
waterproof**



**Good thermal
insulation**

HS - CODE: TRANSPLANTING MACHINE 84 32 39 90

PRODUCT LINK: spapperi.com/en/products/transplanters/to08-am

INFORMATIONS

Commercial and Technical Brochure - Horticulture Line – Transplanters: The original Italian texts shall prevail over any foreign translation in case of interpretation doubts.

Technical data, measurements, and photos are provided for indicative purposes and are non-binding. Images marked as 'AI generated' are for illustrative/graphic purposes only and do not constitute a warranty or binding specification.

SPAPPERI N.T. s.r.l. reserves the right to make modifications, updates, or discontinue models without notice. Obsolete items will be replaced with products of equivalent performance.

Contents and photos are the exclusive property of SPAPPERI N.T. s.r.l. any reproduction, even partial, is prohibited without prior authorization from Spapperi N.T.

This brochure cancels and replaces all previous versions.

Edition: 01 September 2026

SOCIAL MEDIA HUB



YouTube

SCAN



www.youtube.com/@spapperint

**Subscribe to the channel
and don't miss a new video.**



Instagram

SCAN



www.instagram.com/spapperintsrl

**Follow us now
to stay connected.**



facebook

SCAN



www.facebook.com/spapperintsrl

**Follow our page
and join our community.**



LinkedIn

SCAN



www.linkedin.com/company/spapperi-n-t-s-r-l

**Follow our company page
for industry insights.**



ORIGINAL EQUIPMENT MANUFACTURER

SPAPPERI

SPAPPERI NT S.r.l.

Via P. Ercolani, 5/b - 06012 San Secondo di Città di Castello (PG) Italy
tel. +39 075 8578156 fax +39 075 8575548

www.spapperi.com - info@spapperi.com

