

SPAPPERI



BROCHURE SC



horticultural product range / soil care

SPAPPERI

POST-TRASPLANT SOIL CARE



Spapperi offers various solutions for post-transplant soil care, including inter-row cultivators and inter-plant rotary tillers.

Our machineries are designed to improve operator ergonomics and overall efficiency.

Configurations are available for every needs.

Customized solutions can also be developed.

Made in Italy - UE



Combi machine for cultivation/weeding and ridging/hilling, suitable for any type of row crop.
Modular and configurable design: from 2 to 4 rows. (additional elements can be provided on request).

TIPE OF WEEDING





Weeding on open field



LAYOUT PLANTING

SINGLE ROWS

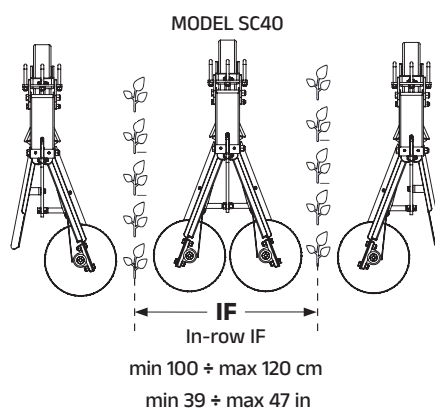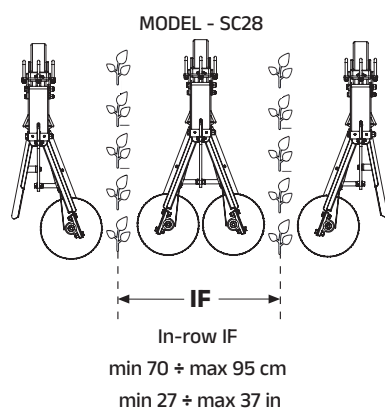

REGULAR EQUIPMENT

- Frame (equipped with bench) and number of elements according to the **setup**.
- Each element features a parallelogram linkage for following ground.
- Ridging/Hilling cones with free rotation, two different solution SC28 with 28 cm diameter's cone and SC40 with 40 cm diameter's cone.
- Excluding all required specifications and accessories (flex weeding springs, fertilizer spreader, ecc)

Number of row

2- 4

Planting layout

Single rows

Trasmission

Idler roller

Operator seat

No operator on board

In-plant - IP

Any in-plant distance

In-row - IF

80 - 120 cm / 31 - 47 in


According the diameter's cone

In-double row - IB

NA

Estimated productivity

1 Ha/h per element



A **SETUPS (Mandatory):** Select the setup according to the number of rows and the In-row spacing.

B **REQUIRED SPECIFICATIONS (Mandatory):** Not available for models SC28 and SC40

C **ACCESSORIES:** If needed add any desired accessories.

A **SC28 - SC40 SETUPS: CHARACTERISTICS & REQUIREMENT - (Mandatory choice)**

“F2” FIXED FRAMES FEATURING 2 TUBOLARS, “P2” FOLDABLE FRAMES FEATURING 2 TUBOLARS.

MODEL SC28 SINGLE ROW	2	4
		
Frame width - cm	300	540
in	118	212
Hook - Cat	2	2
In-row IF (min-max) - cm	70-95	70-95
in	27-37	27-37
Tractor power - Hp	65-75	85-95
Weight (without accessories) - Kg	565	837-870

MODEL SC40 SINGLE ROW	2	4
		
Frame width - cm	300	540
in	118	212
Hook - Cat	2	2
In-row IF (min-max) - cm	100-120	100-120
in	39-47	39-47
Tractor power - Hp	65-75	85-95
Weight (without accessories) - Kg	685	877-910



ELEMENT ACCESSORIES AVAILABLE FOR SC28 - SC40

Springs



RECOMMENDED

Descrizione

FLEX WEEDING SPRING

Flex weeding springs kit for 2 rows - SC28

Flex weeding springs kit for 4 rows - SC28

Flex weeding springs kit for 2 rows - SC40

Flex weeding springs kit for 4 rows - SC40

FLEX WHEEDING SPRING KIT



FRAME ACCESSORIES AVAILABLE FOR SC28 - SC40

Fertilier Spreader




Descrizione

FERTILIZER SPREADER WITH WHEEL-DRIVEN TRASMISSION

Fertilizer spreader kit, 2 x 170L steel hopper, 1 x granulated fertilizer dosing per hopper

Fertilizer spreader kit, 2 x 170L steel hopper, 2 x granulated fertilizer dosing per hopper

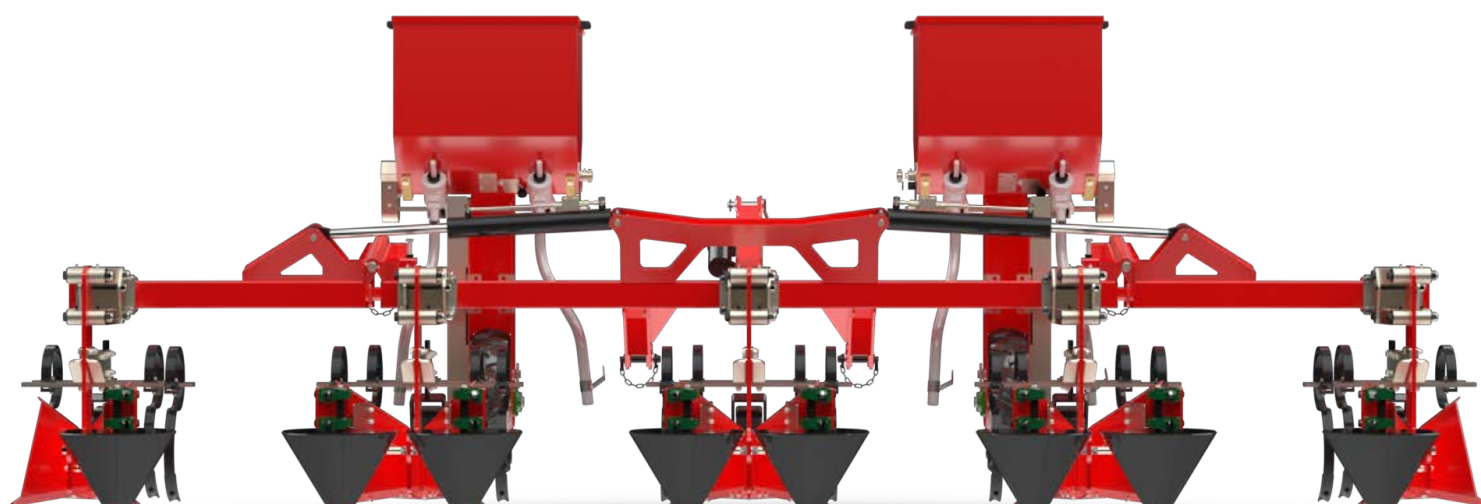FERTILIZER SPREADER WHEEL-DRIVEN
MECHANICAL TRASMISSION - SC



INFORMATIONS

NOMENCLATURE

REGULAR EQUIPMENT: The basic equipment included with the machine, this does not include required specifications and accessories.

A - SETUP: The basic equipment includes: frame and weeding units.

B - REQUIRED SPECIFICATIONS: Equipment requested by the customer based on their specific needs, which are mandatory to complete the machine's basic functionality and finalize the order.

C - ACCESSORIES: Optional items requested by the customer according to their needs, which are not mandatory for the basic operation of the machine. These can be selected during the ordering process.

COLOR MACHINE



RED
RAL 3020



LIGHT GREY
RAL 7045



DARK GREY
RAL 7016



BLACK
RAL 9005

CHARACTERISTICS



Fast
tuning



Long
resistance



Good
waterproof



Good thermal
insulation

HS - CODE: Weeding machine **84 32 10 00**

PRODUCT LINK: spapperi.com/en/products/inter-row/sc

INFORMATIONS

Technical and commercial Brochure for the Horticultural Product rang – Soil Care: the original italian texts shall prevail over any foreign translation in the event of any doubts regarding interpretation.

Technical data, dimensions, and photos are provided for indicative purposes only and are not binding. Images marked as "AI generated" serve solely for illustrative/graphic purposes and do not constitute a warranty or binding specification.

SPAPPERI NT SRL reserves the right to make modifications, update, or discontinue models without prior notice. Obsolete items will be replaced with products of equal performance.

Contents and photos are the exclusive property of SPAPPERI; any reproduction, even partial, is strictly prohibited without prior authorization from Spapperi.

This brochure cancels and replaces all previous versions.

Edition: 01 September 2026

SOCIAL MEDIA HUB



YouTube

SCAN



www.youtube.com/@spapperint

**Subscribe to the channel
and don't miss a new video.**



SCAN



www.instagram.com/spapperintsrl

**Follow us now
to stay connected.**



facebook

SCAN



www.facebook.com/spapperintsrl

**Follow our page
and join our community.**



LinkedIn

SCAN



www.linkedin.com/company/spapperi-n-t-s-r-l

**Follow our company page
for industry insights.**



ORIGINAL EQUIPMENT MANUFACTURER

SPAPPERI

SPAPPERI NT S.r.l.

Via P. Ercolani, 5/b - 06012 San Secondo di Città di Castello (PG) Italy
tel. +39 075 8578156 fax +39 075 8575548

www.spapperi.com - info@spapperi.com

